



next generation led

info@nextgenerationled.be  
 www.nextgenerationled.be  
 Tel + 32 53 71 09 42

CRI98 19.2W/m  
 10mm 140LED/m  
 IP20

### Properties


- Under constant current condition, brightness output is more stable, life is longer.
- High brightness consistency between different units and batches, more suitable for large projects.
- Highly fitted to the visible spectrum, making the illuminated object closer to the color under natural light.
- Higher Color fidelity, Rf>95.
- Higher color saturation, Rg ≥ 100.
- Low blue light spectrum, healthy lighting.
- [PURCHASE LED STRIPS ONLINE](#)

### Applications

Office, showroom, meeting room, hallway, ...



### DIMENSION

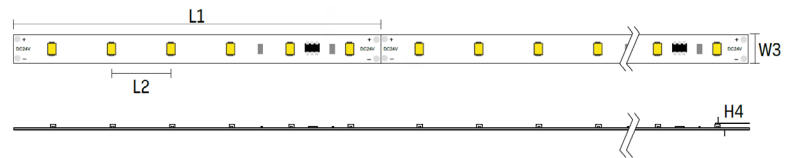

### Specifications

L1(mm)	L2(mm)	W3(mm)	H4(mm)
50	8.3	10	1.4

### Technical details

LUMENS PER METER(lm/M)						
2200K	2400K	2700K	3000K	4000K	5000K	6000K
-	-	1480	1500	1550	1520	1520

Updated: July 2019

