

LOW BAY HALO

Properties

- Lifespan L70 %: > 40.000 hours
- Surface mounted and pendant
- PVC housing
- Prismatic cover
- Pendant set 1500mm (not included)
- Energy savings up to 65%
- CREE LEDs and dimmable LED driver
- Warranty : 3 years



IP 20

TRIAC dimming



60° Beam

Specifications

LOW BAY HALO		
Power	25W	35W
Luminous intensity	2000lm	3100lm
Power factor (Pf)	≥0.9 at Max. Load	
Input volatge	220-240 V AC 50/60 Hz	
Color rendering index	Ra >80	
Color temperature	3000 K - 4000 K	
Temperature in use	- 30°C ~ 45°C	
Beam angle	120°	
UGR	< 19	
SDCM	< 3	

Application

Indoor, living room, bedroom, kitchen, etc...

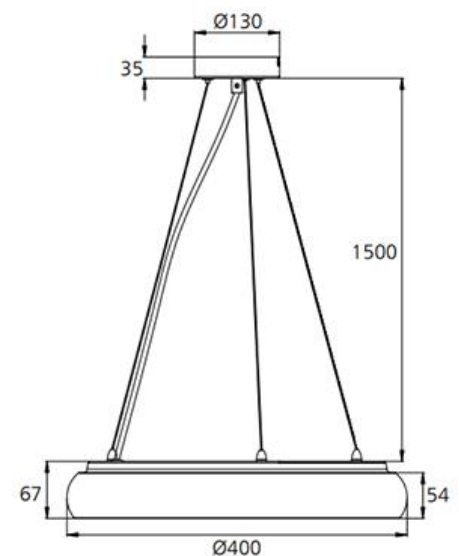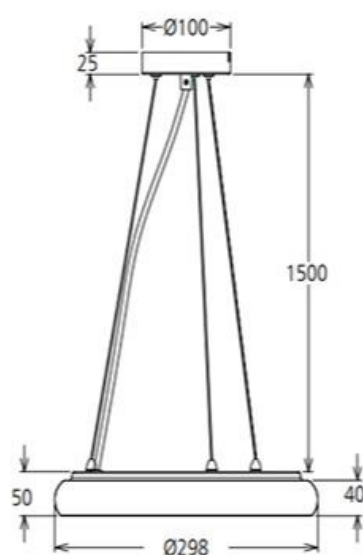



next generation led

LOW BAY HALO

REFERENCE	LUMEN	COLOR	BEAM	DIMMABLE
156-0405	1850lm	3000 K	120°	YES
156-0406	2000lm	4000 K	120°	YES
156-0407	2940lm	3000 K	120°	YES
156-0408	3290lm	4000 K	120°	YES
156-0409	Pendant Set 1500mm			