



next generation led

info@nextgenerationled.be
www.nextgenerationled.be
Tel + 32 53 71 09 42

BOLLARD

Properties

- Lifespan L70 %: > 50.000 hours
- Marine grade full stainless steel 316
- Stainless steel root mount kit
- Immediate start regardless of temperature or humidity
- No mercury or toxic gasses
- Unique and innovative induction power supply
- CREE 3535 chip
- Inductive plug driver located in the base of the fitting which transmits electricity wirelessly
- Induction allows the base to be hard wired without fear of electrocution
- Warranty: 5 y

80 lm/W

IP 66

Specifications

Bollard	
Power	6W~18W
Color rendering index	Ra > 80
Input voltage	AC 220 - 240 V / AC100-277V 50/60Hz
Color temperature	3000K ~6500K
Dimension[D*H]	Ø170x750mm




Applications

Parks, hotel exteriors, gardens, theme parks, resorts, ...

Updated: June 2020



Dimensions (mm)

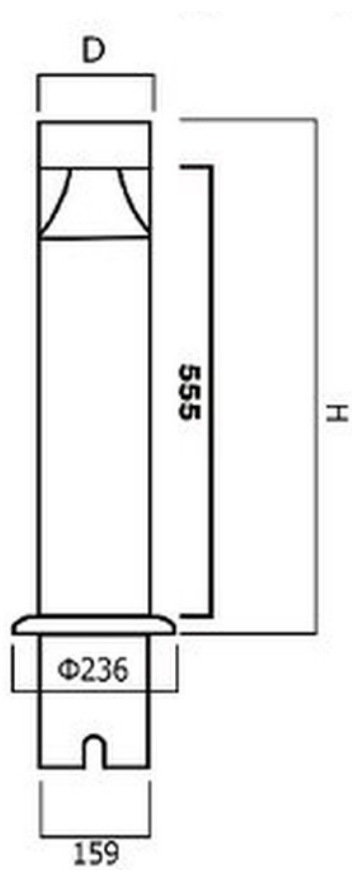

BOLLARD

REFERENCE	DIMENSION	WATT	LUMEN	COLOR
290-0279	Ø170x750mm	6 W	80lm/W	3000K~6500K
290-0280	Ø170x750mm	9 W	80lm/W	3000K~6500K
290-0281	Ø170x750mm	12 W	80lm/W	3000K~6500K
290-0282	Ø170x750mm	18 W	80lm/W	3000K~6500K