



next generation led

info@nextgenerationled.be
www.nextgenerationled.be
Tel + 32 53 71 09 42

TL T5 (external driver)

Properties

- Lifespan L80B10: 50.000 hours
- External driver (selv type)
- Fully Dimmable (1-10 V or DALI)
- Flicker free to reduce the eyestrain
- Environmentally friendly
- IP class: 33
- High resistance to corrosive gasses
- Instant switch-on
- Warranty: 5 years



150lm/w

Dimmable

External
Driver


Specifications

LED T5	60	90	120	150
Length	549mm	849mm	1149mm	1449 mm
Power	12 W	18W	24W	30W
Luminous flux	1800lm	2700lm	3600lm	4500lm
Diameter	16 mm (cap 18.5 mm)			
Color temperature	3000K (4000K - 5000K - 6500K optional)			
Color rendering index	>90 CRI			
Temperature in use	- 40°C ~ +45°C			

Application



Offices, hospitals, hotels, supermarkets,
library, corridors,...

Updated: Feb. 2021

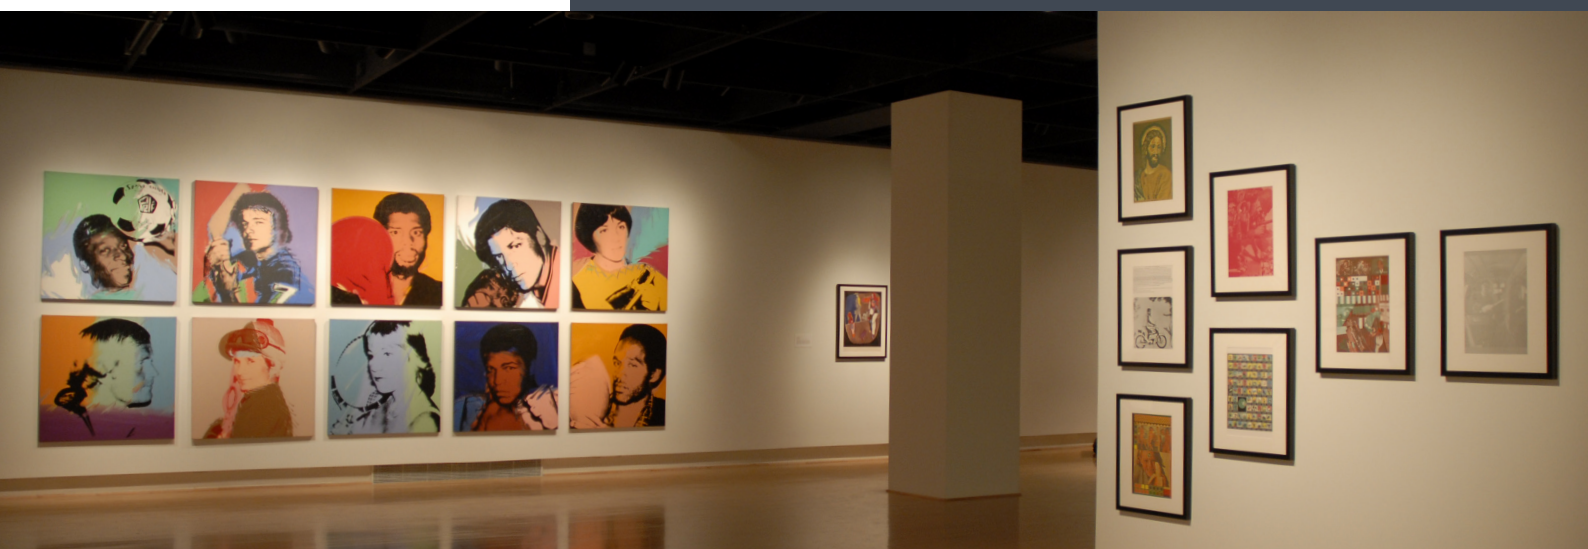

CIE 1931

The CIE color space, developed in 1931, is still used to define colors, and as a reference for other color spaces. The figure is a two-dimensional display of colors of the same intensity (brightness), which is based on observations of color measurements by people.

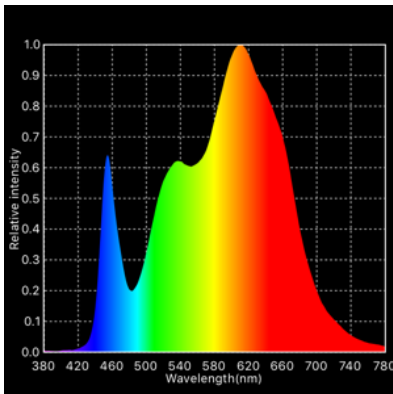
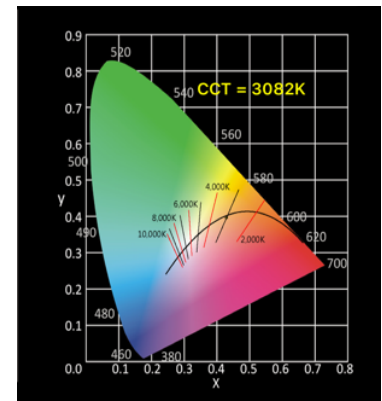


SPECTRUM

Isaac Newton used the Latin word spectrum to define the color series which arose when he dropped a bundle of sunlight through a glass prism. The color spectrum consists of the colors of the rainbow with the color sequence red-orange-yellow-green-blue-indigo-violet, which corresponds to bearish wave length (increasing frequency) of the light waves.

C78 377

ANSI C 78.377 is now the standard for color quality, as determined by the American National Standards Institute. ANSI recommends lamp manufacturers to stay within a 4-step ellipse. This means that manufacturers with a particular focus on the CIE diagram have a broad range of observable differences.

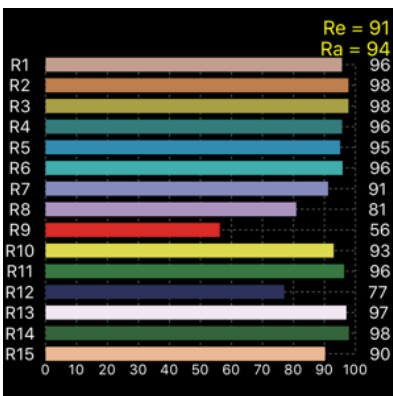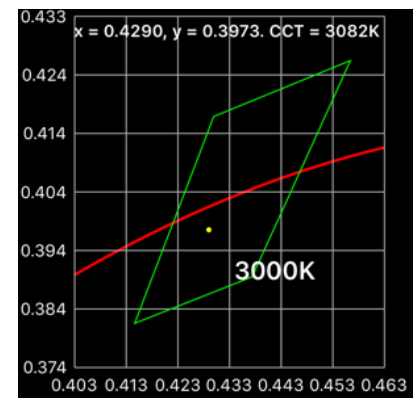

CRI HISTOGRAM

The color reproduction of a light source indicates whether the color of an object can be displayed true to nature. The graph shows whether we can accurately determine color, depending on the color rendering properties of the light source.

Ra = average of R1 to R8


Re = average of R1 to R15

R9 = saturated red. Should be as high as possible.

SDCM


SDCM is an acronym which stands for Standard Deviation Colour Matching. SDCM has the same meaning as a "MacAdam ellipse". A 1-step MacAdam ellipse defines a zone in the CIE 1931 2 deg (xy) colour space within which the human eye cannot discern colour difference. Most LEDs are binned at the 4-7 step level, in other words you certainly can see colour differences in LEDs that are ostensibly the same colour.

SDCM	CCT @ 3000K	ΔU_V
1x	±30K	±0.0007
2x	±60K	±0.0010
4x	±100K	±0.0020
7-8x	±175K	±0.0060

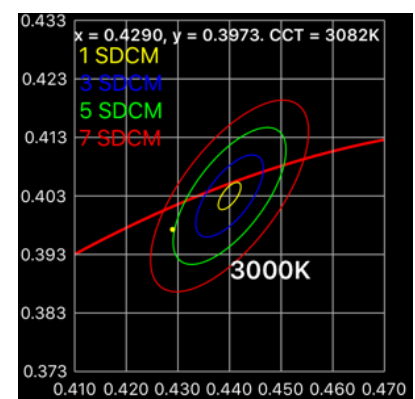


ENERGYLABEL

Electrical appliances carry an energy label. This label prints the so-called energy efficiency score in classes. These classes range from 'very energy efficient' (A++) to 'very waste of energy' (E). A more expensive new device may eventually turn out to be cheaper if the energy score is good. IPEA is the new system for luminaire energy efficiency assessment.

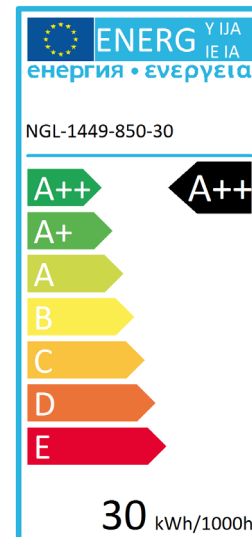


BEAM

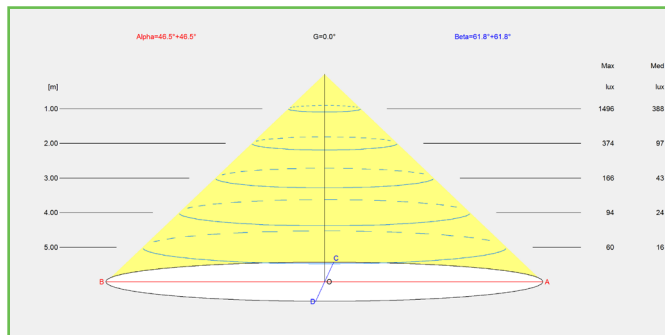

The Illuminance Cone Diagram indicates the maximum illuminance at different distances from the fixture.>

POLAR DIAGRAM

The polar luminous intensity graph illustrates the distribution of luminous intensity, in candelas, for the transverse (solid line) and axial (dashed line) planes of the luminaire. The shown curve provides a visual guide to the type of distribution expected from the luminaire e.g. wide, narrow, direct, indirect... in addition to intensity.

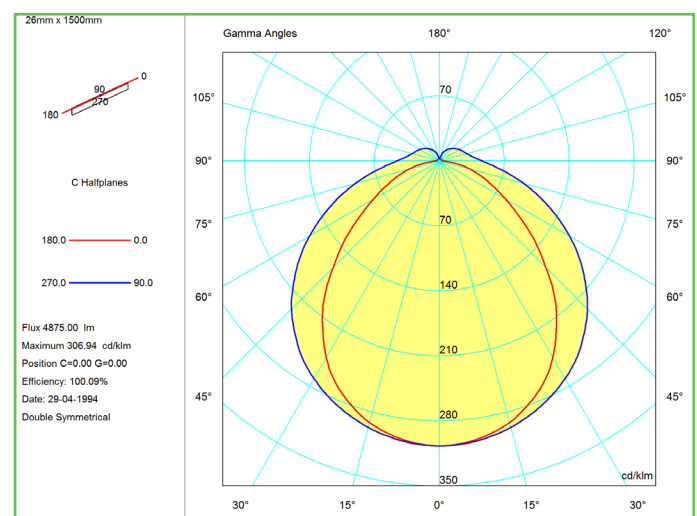

TL T5 (external driver required)

REFERENCE	LENGTH	WATT	COLOR	DIMMABLE
220-0100	549 mm	12 W	3000K	Yes
220-0101	549 mm	12 W	4000K	Yes
220-0102	549 mm	12 W	5000K	Yes
220-0103	549 mm	12 W	6500K	Yes
220-0104	849 mm	18 W	3000K	Yes
220-0105	849 mm	18 W	4000K	Yes
220-0106	849 mm	18 W	5000K	Yes
220-0107	849 mm	18 W	6500K	Yes
220-0108	1149mm	24 W	3000K	Yes
220-0109	1149mm	24 W	4000K	Yes
220-0110	1149mm	24 W	5000K	Yes
220-0111	1149mm	24 W	6500K	Yes
220-0112	1449mm	30 W	3000K	Yes
220-0113	1449mm	30 W	4000K	Yes
220-0114	1449mm	30 W	5000K	Yes
220-0115	1449mm	30 W	6500K	Yes