



next generation led

info@nextgenerationled.be  
 www.nextgenerationled.be  
 Tel + 32 53 71 09 42

## COLOR SELECTABLE TRACKLIGHT

### Properties

- Lifespan L70 %: > 40.000 hours
- 90° tilt adjustment - 350° rotation
- LED Nichia
- Illuminating fabrics in true colors  
True white and rich texture of black fabric become visible
- Special filters enhance the colors, shapes and textures of food, meat, fish, bread and vegetables
- LED with latest phosphor technology
- Flicker free to reduce the eyestrain
- Environment friendly : no mercury or toxic gasses
- External driver
- Immediate start regardless of temperature or humidity
- Warranty: 3 years

### Application

Supermarkets, clothing shop, fish shop, butcher and bakeries



CRI >93	3 y. warranty	Filter Options	Latest Phosphor Technology
---------	---------------	----------------	----------------------------

### Specifications



TRACK OKA OECD	EU30	EUS30	EU40	EUS40
Power	30.2 W	30.2 W	37.7 W	37.7 W
Luminous intensity	2569	2569	3015	3015
Glare	Normal	Anti-Glare	Normal	Anti-Glare
Beam Angle	Medium (23°) or Wide (33°)			
Input voltage	AC 100 ~240 V / 50-60 Hz			
Color temperature	2700 K / 3500 K / 4000 K			
Color rendering index	CRI>93			
Dimming	No			
Dia track light	92 mm			
Height track light	240 mm			
Weight	1.1 kg	1.3 kg	1.1 kg	1.3 kg

Updated: May 2017



## ENERGYLABEL

Electrical appliances carry an energy label. This label prints the so-called energy efficiency score in classes. These classes range from 'very energy efficient' (A++) to 'very waste of energy' (E). A more expensive new device may eventually turn out to be cheaper if the energy score is good. IPEA is the new system for luminaire energy efficiency assessment.

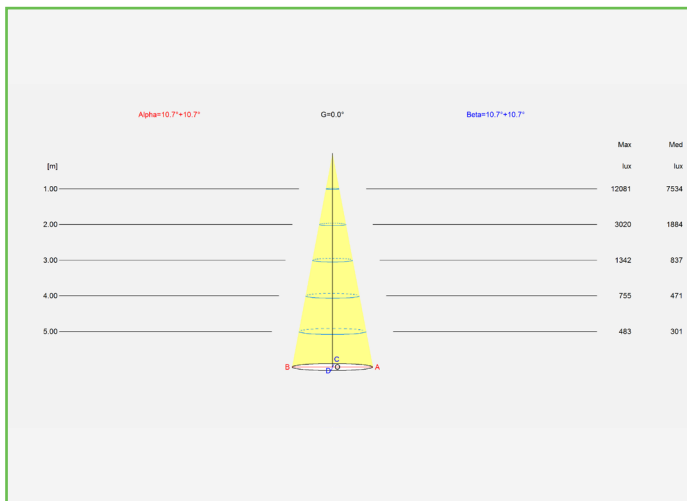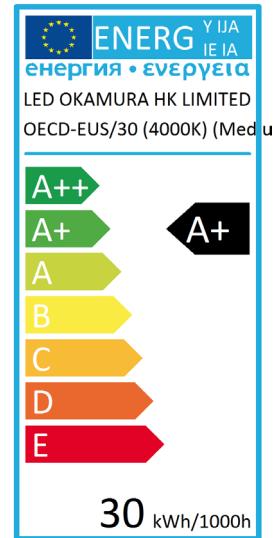


## BEAM

The Illuminance Cone Diagram indicates the maximum illuminance at different distances from the fixture.

## POLAR DIAGRAM

The polar luminous intensity graph illustrates the distribution of luminous intensity, in candelas, for the transverse (solid line) and axial (dashed line) planes of the luminaire. The shown curve provides a visual guide to the type of distribution expected from the luminaire e.g. wide, narrow, direct, indirect... in addition to intensity.

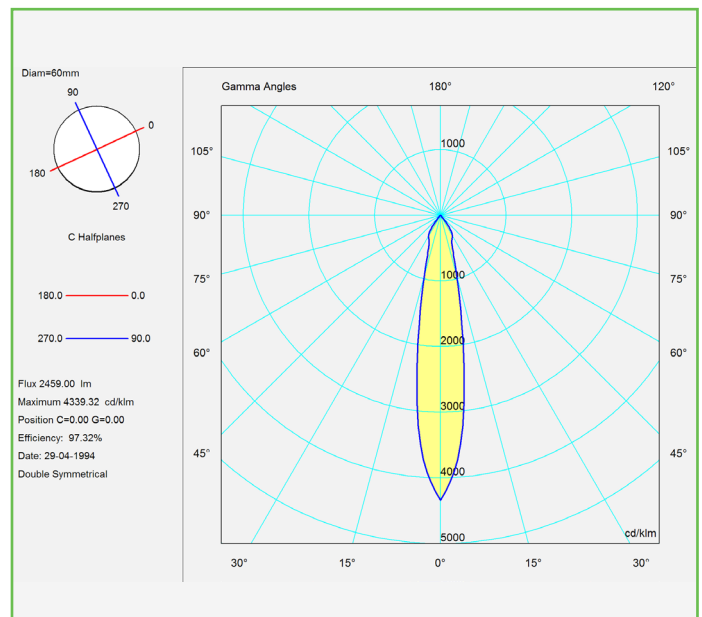

## COLOR SELECTABLE DOWNLIGHTER EU

REFERENCE	WATT	LUMEN	COLOR	BEAM	FINISH
156-0100	30.2 W	2569 Lm	2700 K	Medium	White
156-0101	30.2 W	2569 Lm	2700 K	Wide	White
156-0102	30.2 W	2569 Lm	3500 K	Medium	White
156-0103	30.2 W	2569 Lm	3500 K	Wide	White
156-0104	30.2 W	2569 Lm	4000 K	Medium	White
156-0105	30.2 W	2569 Lm	4000 K	Wide	White
156-0106	30.2 W	2569 Lm	2700 K	Medium	Black
156-0107	30.2 W	2569 Lm	2700 K	Wide	Black
156-0108	30.2 W	2569 Lm	3500 K	Medium	Black
156-0109	30.2 W	2569 Lm	3500 K	Wide	Black
156-0110	30.2 W	2569 Lm	4000 K	Medium	Black
156-0111	30.2 W	2569 Lm	4000 K	Wide	Black
156-0115	37.7 W	3015 Lm	2700 K	Medium	White
156-0116	37.7 W	3015 Lm	2700 K	Wide	White
156-0117	37.7 W	3015 Lm	3500 K	Medium	White
156-0118	37.7 W	3015 Lm	3500 K	Wide	White
156-0119	37.7 W	3015 Lm	4000 K	Medium	White
156-0120	37.7 W	3015 Lm	4000 K	Wide	White
156-0121	37.7 W	3015 Lm	2700 K	Medium	Black
156-0122	37.7 W	3015 Lm	2700 K	Wide	Black
156-0123	37.7 W	3015 Lm	3500 K	Medium	Black
156-0124	37.7 W	3015 Lm	3500 K	Wide	Black
156-0125	37.7 W	3015 Lm	4000 K	Medium	Black
156-0126	37.7 W	3015 Lm	4000 K	Wide	Black





## COLOR SELECTABLE DOWNLIGHTER EUS

REFERENCE	WATT	LUMEN	COLOR	BEAM	FINISH
156-0150	30.2 W	2569 Lm	2700 K	Medium	White
156-0151	30.2 W	2569 Lm	2700 K	Wide	White
156-0152	30.2 W	2569 Lm	3500 K	Medium	White
156-0153	30.2 W	2569 Lm	3500 K	Wide	White
156-0154	30.2 W	2569 Lm	4000 K	Medium	White
156-0155	30.2 W	2569 Lm	4000 K	Wide	White
156-0156	30.2 W	2569 Lm	2700 K	Medium	Black
156-0157	30.2 W	2569 Lm	2700 K	Wide	Black
156-0158	30.2 W	2569 Lm	3500 K	Medium	Black
156-0159	30.2 W	2569 Lm	3500 K	Wide	Black
156-0160	30.2 W	2569 Lm	4000 K	Medium	Black
156-0161	30.2 W	2569 Lm	4000 K	Wide	Black
156-0165	37.7 W	3015 Lm	2700 K	Medium	White
156-0166	37.7 W	3015 Lm	2700 K	Wide	White
156-0167	37.7 W	3015 Lm	3500 K	Medium	White
156-0168	37.7 W	3015 Lm	3500 K	Wide	White
156-0169	37.7 W	3015 Lm	4000 K	Medium	White
156-0170	37.7 W	3015 Lm	4000 K	Wide	White
156-0171	37.7 W	3015 Lm	2700 K	Medium	Black
156-0172	37.7 W	3015 Lm	2700 K	Wide	Black
156-0173	37.7 W	3015 Lm	3500 K	Medium	Black
156-0174	37.7 W	3015 Lm	3500 K	Wide	Black
156-0175	37.7 W	3015 Lm	4000 K	Medium	Black
156-0176	37.7 W	3015 Lm	4000 K	Wide	Black

