



next generation led

info@nextgenerationled.be
www.nextgenerationled.be
Tel + 32 53 71 09 42



WEATHERPROOF LUMINAIRES

Properties

- Base of glass-reinforced polyester moulded by compression
- Diffusers in injection moulded polycarbonate with internal prismatic profile
- Reflector in white pre-coated steel
- Reflector is hingeable on the reflector retaining clip
- Single-end wiring (3 x 2.5 mm²)
- Vandal proof, polycarbonate clip
- IP65
- CE and ENEC approved

IP 65 Vandal Proof LED Wiring EURO


Specifications

| BATTEN | LENGTH | WIDTH | HEIGHT |
|------------|---------|--------|---------|
| 1 X 60 CM | 665 mm | 84 mm | 98.5 mm |
| 1 X 120 CM | 1275 mm | 84 mm | 98.5 mm |
| 1 X 150 CM | 1575 mm | 84 mm | 98.5 mm |
| 2 X 60 CM | 665 mm | 134 mm | 98.5 mm |
| 2 X 120 CM | 1275 mm | 134 mm | 98.5 mm |
| 2 X 150 CM | 1575 mm | 134 mm | 98.5 mm |

Application

All applications where TL tubes can be used, ...

Updated: May 2017

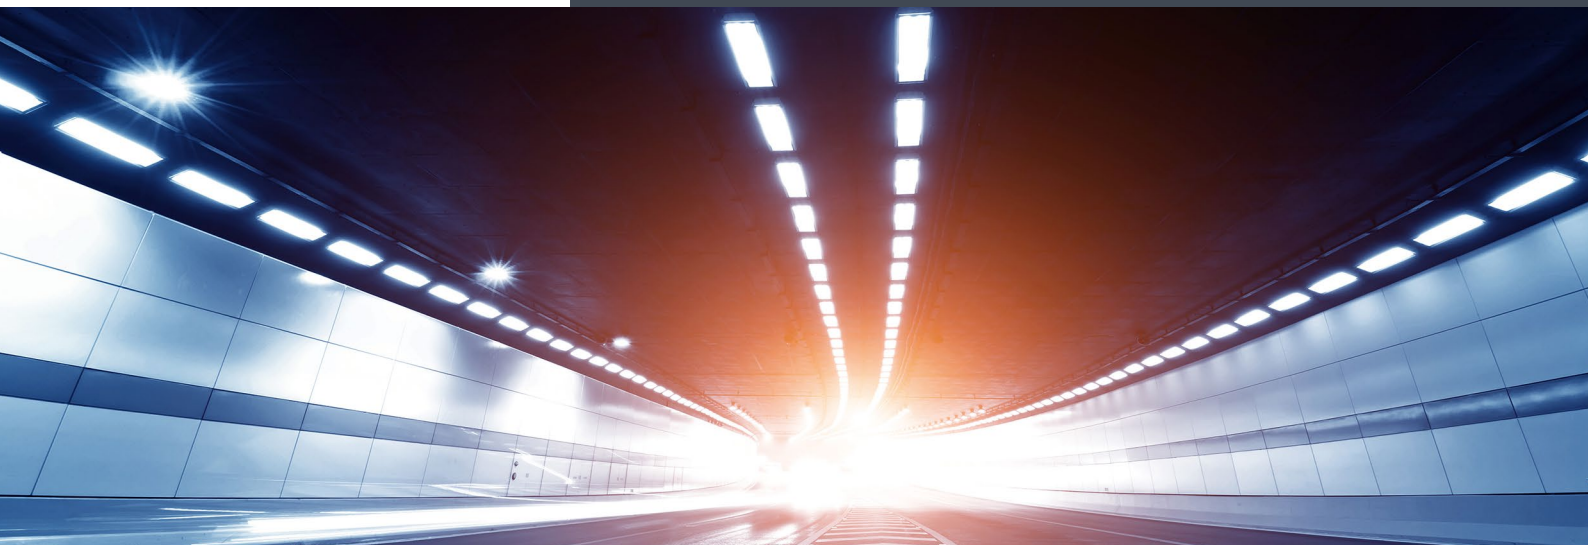

WEATHERPROOF LUMINAIRES

| REFERENCE | ROWS | LENGTH |
|-----------|--------|--------|
| 500-0001 | SINGLE | 60 cm |
| 500-0002 | SINGLE | 120 cm |
| 500-0003 | SINGLE | 150 cm |
| 500-0004 | DOUBLE | 60 cm |
| 500-0005 | DOUBLE | 120 cm |
| 500-0006 | DOUBLE | 150 cm |

