




next generation led

info@nextgenerationled.be  
www.nextgenerationled.be  
Tel + 32 53 71 09 42

# Supermaruchan

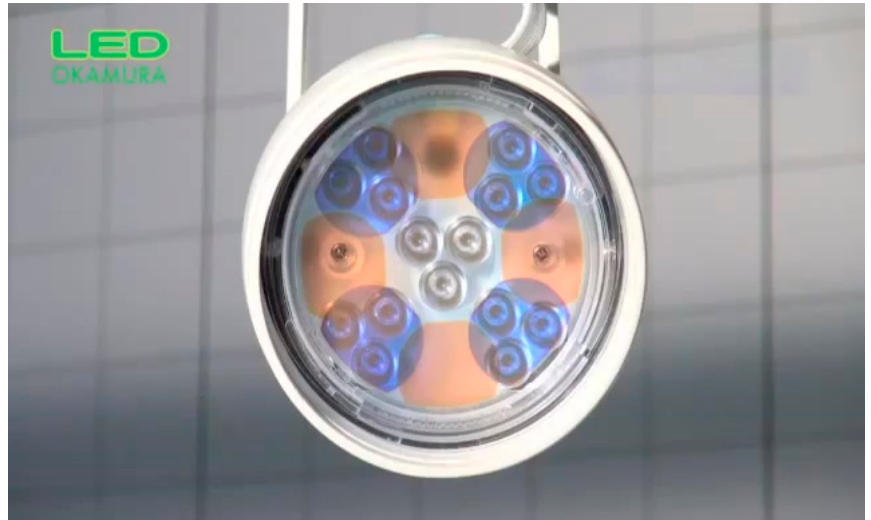

## Properties

- Lifespan L70 %: > 40.000 hours
- Beam angle 20° ~ 37°
- 90° tilt adjustment - 330° rotation
- One filter allows different color temperatures
- Illuminating fabrics in true colors  
True white and rich texture of black fabric becomes visible
- Special filters enhance the colors, shapes and textures of food, meat, fish, bread and vegetables
- LED with latest phosphor technology
- Flicker free to reduce the eyestrain
- Environment friendly : no mercury or toxic gasses
- External driver
- Immediate start regardless of temperature or humidity
- Warranty: 3 years


## Application

Supermarkets, clothing shop, fish shop, butchers and bakeries

CRI >93	3 y. warranty	Filter Options	Latest Phosphor Technology
---------	---------------	----------------	----------------------------

## Specifications

TRACK OKA OEMD-EU50	
Power	54W
Luminous intensity	3263 lm
Beam Angle	Medium (20°) Wide (29°) or Super Wide (37°)
Input voltage	AC 100 ~240 V / 50-60 Hz
Color temperature	3500K
Color rendering index	CRI>90


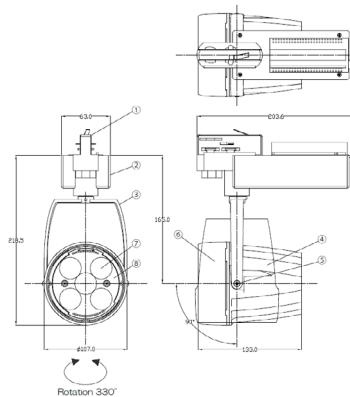


Updated: November 2018



## CIE 1931

The CIE color space, developed in 1931, is still used to define colors, and as a reference for other color spaces. The figure is a two-dimensional display of colors of the same intensity (brightness), which is based on observations of color measurements by people.

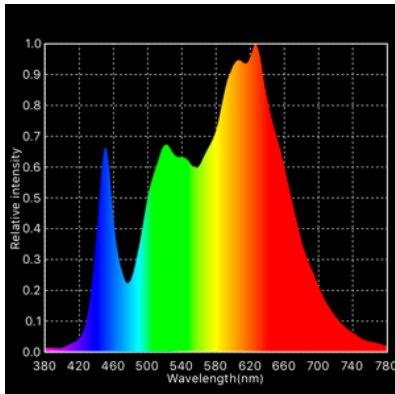
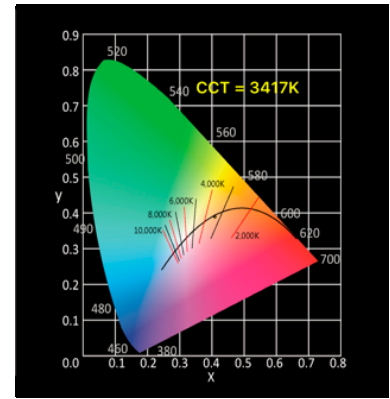


## SPECTRUM

Isaac Newton used the Latin word spectrum to define the color series which arose when he dropped a bundle of sunlight through a glass prism. The color spectrum consists of the colors of the rainbow with the color sequence red-orange-yellow-green-blue-indigo-violet, which corresponds to bearish wave length (increasing frequency) of the light waves.

## C78 377

ANSI C 78.377 is now the standard for color quality, as determined by the American National Standards Institute. ANSI recommends lamp manufacturers to stay within a 4-step ellipse. This means that manufacturers with a particular focus on the CIE diagram have a broad range of observable differences.

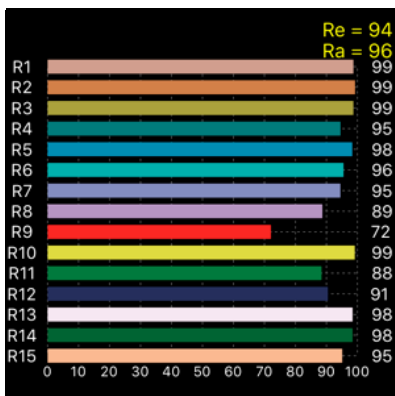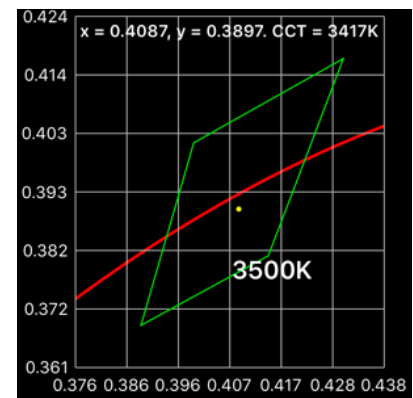

## CRI HISTOGRAM

The color reproduction of a light source indicates whether the color of an object can be displayed true to nature. The graph shows whether we can accurately determine color, depending on the color rendering properties of the light source.

Ra = average of R1 to R8


Re = average of R1 to R15

R9 = saturated red. Should be as high as possible.

## SDCM



SDCM is an acronym which stands for Standard Deviation Colour Matching. SDCM has the same meaning as a "MacAdam ellipse". A 1-step MacAdam ellipse defines a zone in the CIE 1931 2 deg (xy) colour space within which the human eye cannot discern colour difference. Most LEDs are binned at the 4-7 step level, in other words you certainly can see colour differences in LEDs that are ostensibly the same colour.

SDCM	CCT @ 3000K	$\Delta U_V$
1x	$\pm 30K$	$\pm 0.0007$
2x	$\pm 60K$	$\pm 0.0010$
4x	$\pm 100K$	$\pm 0.0020$
7-8x	$\pm 175K$	$\pm 0.0060$

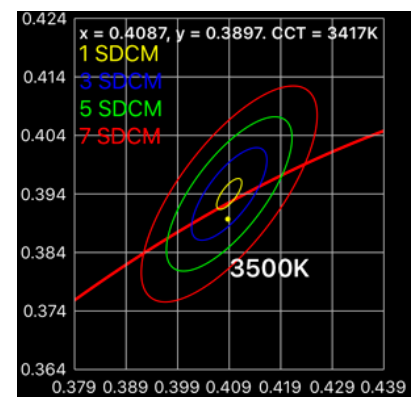

## ENERGY LABEL

Electrical appliances carry an energy label. This label prints the so-called energy efficiency score in classes. These classes range from 'very energy efficient' (A++) to 'very waste of energy' (E). A more expensive new device may eventually turn out to be cheaper if the energy score is good. IPEA is the new system for luminaire energy efficiency assessment.

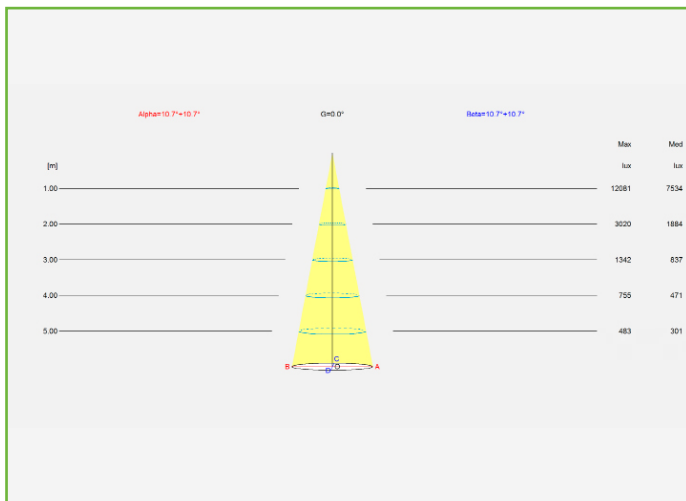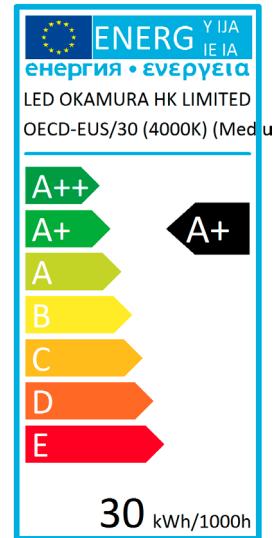


## BEAM

The Illuminance Cone Diagram indicates the maximum illuminance at different distances from the fixture.

## POLAR DIAGRAM

The polar luminous intensity graph illustrates the distribution of luminous intensity, in candelas, for the transverse (solid line) and axial (dashed line) planes of the luminaire. The shown curve provides a visual guide to the type of distribution expected from the luminaire e.g. wide, narrow, direct, indirect... in addition to intensity.

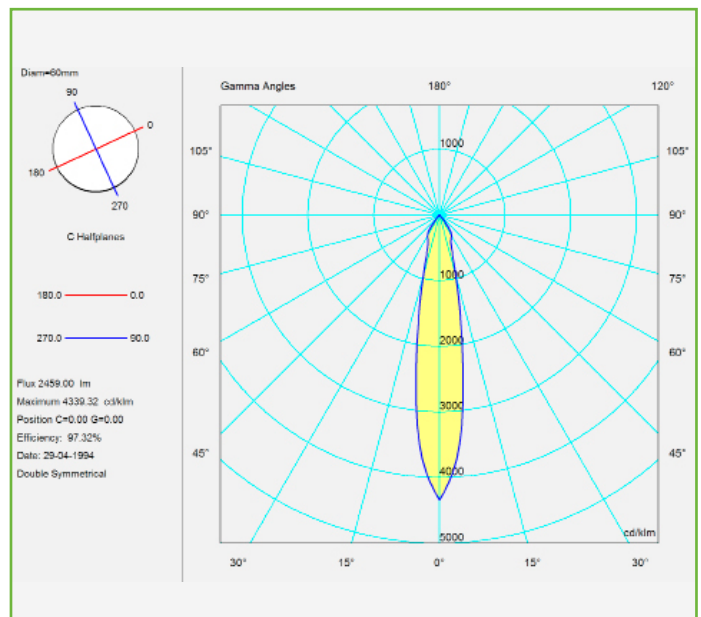

## TRACK SUPERMARUCHAN

REFERENCE	WATT	LUMEN	COLOR	BEAM	FINISH
156-0182	54 W	3263 Lm	3500 K	Medium	Black
156-0183	54 W	3263 Lm	3500 K	Wide	Black
156-0184	54 W	3263 Lm	3500 K	Super Wide	Black
156-0185	54 W	3263 Lm	3500 K	Medium	White
156-0186	54 W	3263 Lm	3500 K	Wide	White
156-0187	54 W	3263 Lm	3500 K	Super Wide	White
900-0626	2700-4000K filter for Supermaruchan				
900-0627	Meat filter for Supermaruchan				

